




## XPL LO-PRO Light Bar

Slim Style and Performance

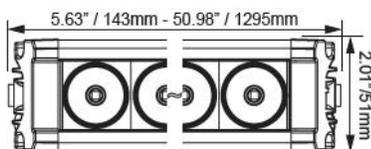

### IRIS reflector technology

The XPL Halo Series of LED Light Bars builds upon the XPR Series by combining the distance power of Iris Reflector Technology with an ultra slim housing design. Utilizing a powerful 5W Cree LED, the XPL series is able to produce up to 19,260 lumens and over 2,000 ft. of usable light.

The XPL Series Light Bar comes standard with the newly redesigned mounting feet and the option to add wiring harness and/or side wing mounts.

Allowing the option to mount with Side Wings off each end cap or with Vision X's foot mounting design. Both mounting options allow for adjustability once installed, so you can aim the light for optimal visibility.

## XPL LO-PRO Light Bar Features

- Smooth Backlit
- Proprietary IRIS Reflector Technology
- Dual Mounting Standard
- Weatherproof Deutsch Connector
- Polycarbonate Lens

### High Intensity CREE LED

The 5W XP-L-HI LED from CREE is what allows the XPL to project light up to 2.067 ft. (630m.).

### Smooth backlight

The XPL comes equipped with a back-lit halo that can be used as a daytime running light. (SAE Compliant for 20" and under).

### Dual Mounting Standard

Each XPL light bar includes side wing mounts and our newly design mounting feet.



# Technical Information

**FEET MOUNT**



PART#	Beam Pattern	Raw Lumens	Dimensions	Amp Draw	Wattage
XPL-H3EMH	10° Spot	1,605 lm(ea)	143/51/55 mm	1.25A@12V DC	15 Watt
XPL-H6EMH	10° Spot	3,210 lm(ea)	239/51/55 mm	2.5A@12V DC	30 Watt
XPL-H9EMH	10° Spot	4,815 lm(ea)	335/51/55 mm	3.75A@12V DC	45 Watt
XPL-H15EMH	10° Spot	8,025 lm(ea)	527/51/55 mm	6.25A@12V DC	75 Watt
XPL-H24EMH	10° Spot	12,840 lm(ea)	815/51/55 mm	10A@12V DC	120 Watt
XPL-H30EMH	10° Spot	16,050 lm(ea)	1007/51/55 mm	12.5A@12V DC	150 Watt
XPL-H39EMH	10° Spot	19,260 lm(ea)	1295/51/55 mm	15A@12V DC	180 Watt

