




BLB LIGHT DUTY 12 LED

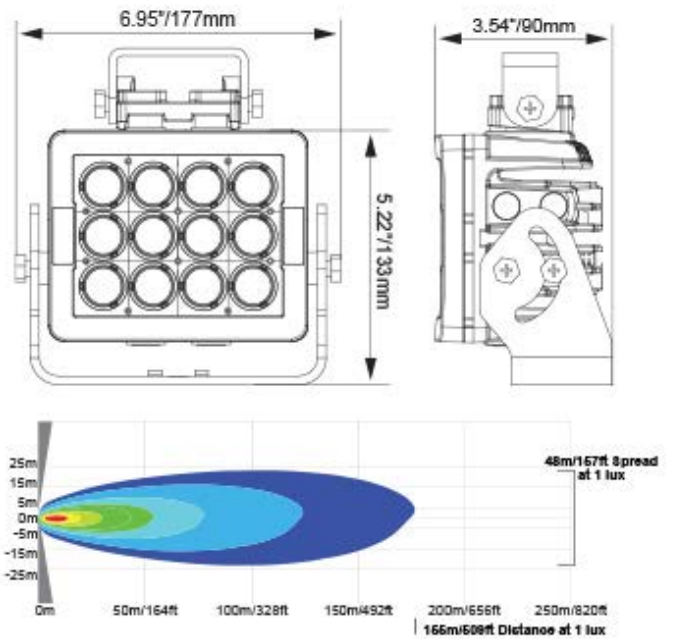

OEM/AFTERMARKET REPLACEMENT LIGHTING FOR HALOGEN/HID

The BT Light Industrial Series offers outstanding light output in a functional design which can be easily adjusted, with either of the supplied trunnion or single bolt bracket options.

High quality construction and components enable the BT Light Industrial Series to withstand vibration up to 21Grms. Built-in reverse polarity protection helps prevent accidental damage caused by incorrect installation. Electronic thermal management ensures that if the light is subjected to massive heat overload, that a self protection protocol is engaged to reduce the light output, until such time as the heat overload retreats to normal parameters.

BLB LIGHT DUTY 12 LED Usage Guide

1000 WATT Halogen Equivalent

Outstanding Light Output | 5 Mounting Configurations | High quality construction and components enable Blacktips to withstand vibration up to 21 Grms. | Dual Mounting Brackets Included | Multiple Mounting Points on Light | Reverse Polarity Protection | Forward rake trunnion bracket | Aiming system located on bracket

Specifications

ITEM#	Beam Pattern	Raw Lumens	Effective Lumens	Wattage
BLB071225	25° Medium	9.600 lm(ea)	6.697 lm(ea)	84 Watt
BLB071240	40° Wide	9.600 lm(ea)	6.697 lm(ea)	84 Watt
BLB071260	60° Extra Wide	9.600 lm(ea)	6.697 lm(ea)	84 Watt
BLB071290	90° Xtrem Wide	9.600 lm(ea)	6.697 lm(ea)	84 Watt
BLB0712E3065L	Elliptical	9.600 lm(ea)	6.697 lm(ea)	84 Watt



Features

- › LEDs: 12 x 7W
- › Housing Material: Aluminium
- › Light Colour Temp: 5700 Kelvin
- › EMC/EMI Approval: CISPR25-Class 3
- › Dimensions: 177/133/90mm
- › Weight: 2.25 kg
- › Voltage: 9-32V DC
- › Amperage: 3.5A@24V DC - 7.0A@12V DC
- › Vibration Rating: 21.2 Grms
- › Lens Material: Polycarbonate
- › Certifications: CE, RoHS, IEC 62471