




## Linear Luminaires

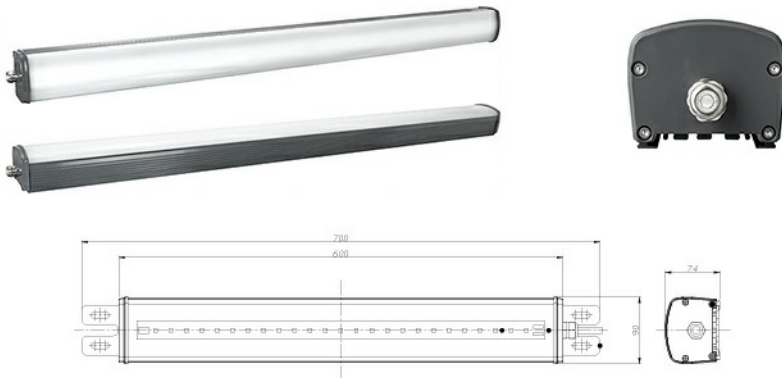

## Features

- ▶ LEDs: 25 LEDs(60w) - 48 LEDs (120W)
- ▶ Housing Material: Aluminium 6061
- ▶ Light Colour Temp: 5.000 Kelvin
- ▶ Dimensions (60W): 600/90/74mm
- ▶ Dimensions (120W): 1200/90/74mm
- ▶ Weight: 3.25 kg (60W) - 5.60 kg (120W)
- ▶ Voltage: 110-277V AC
- ▶ Vibration Rating: 8.7 Grms
- ▶ Lens Material: Polycarbonate
- ▶ Certifications: CE, RoHS, IEC 62471

### Low Mount or Wall pack LED Light fixture

Designed to outshine and outlast the competition, the Linear Luminaire fixture features advanced electronic technology like Pulse Width Modulation, Electronic Thermal Management, and a Redundant Circuit Design that allow the fixture to function even if half of the light should fail for unknown reasons. This is part of the effort by VisionX to ensure that the Linear Luminaire fixture is the most dependable LED fixture in the workplace.

## LINEAR LUMINAIRES LED LIGHT Usage Guide

Ideal for new constructions, remodels or retrofit installations. Ideal for use in: Closets, Foyers, Garages, Hallways, Corridors, Bedrooms, Offices, Kitchens, Utility Work Areas. The LLG0248180 provides up to 50,000 hours life. Low-profile, linear fixture with high-gloss grey die-cast aluminum end caps and white, polycarbonate lens diffuser for wide spread, uniform illumination. Can be surface mounted to walls and ceilings. Easily replaces older two lamp fluorescent fixtures. 120-277V Universal Voltage suitable for both commercial and residential applications. Wide foot print matches the most common 4 foot fixtures 2-Light Fluorescent T8 or T12 Fixtures.

## Specifications

ITEM#	Beam Pattern	Effective Lumens	Wattage
LLG0225180F	180° Wide Flood	8.000 lm(ea)	60 Watt
LLG022590F	90° Flood	8.000 lm(ea)	60 Watt
LLG0248180F	180° Wide Flood	16.000 lm(ea)	120 Watt
LLG024890F	90° Flood	16.000 lm(ea)	120 Watt

